

# INNA-DOR

Stylish, contemporary  
and durable internal  
doorsets

MADE IN  
BRITAIN



## FIRE DOORS

Available with 60,  
120 and 240 mins  
fire protection

TESTED TO

BS 476 Parts 20 & 22  
BS EN 1634

CERTIFIED BY

Warrington Exova  
Certifire



## ACOUSTIC REDUCTION

Reduce acoustic  
transfer up to **45dB\***

TESTED TO

BS EN ISO 140-3: 1995

\*As acoustic design

# INNA-DOR

## Fire Resistant Steel Doors

SSS Industrial Doors has successfully redesigned steel doors away from their original industrial roots to provide a highly cost-effective single solution offering an aesthetic design, durable construction and fire protection for up to 4 hours.

The doors, fitted in internal and external applications in a wide variety of wall constructions, are designed to protect personnel & property from the spread of flames & smoke. Our doors offer substantial benefits over comparable timber doors in strength, durability & security. The range has been tested to BS 476 Parts 20 & 22, BS EN 1634 and holds CERTIFIRE certification.

### > VERSIONS

We offer three versions – each providing increased fire protection (latched or unlatched):

<b>INNA-DOR 60</b>	<b>INNA-DOR 120</b>	<b>INNA-DOR 240</b>
UPTO <b>1 HOUR</b> (60 minutes)	UPTO <b>2 HOURS</b> (120 minutes)	UPTO <b>4 HOURS</b> (240 minutes)

### > DOOR LEAF

#### Production Sizes:

NB: Sizes quoted may exceed manufacturing limitations.

All fire resistant doors are custom made. The maximum size varies according to fire rating as shown below for Mild Steel and 316 or 304 Stainless Steel.

Door Type	Max Width mm	Max Height mm	Max Area m <sup>2</sup>	INNA-DOR 60	INNA-DOR 120	INNA-DOR 240
<b>Single Doors Latched</b> (Single Swing)	1573	3185	4.0	1573	3185	4.0
	1573	3185	4.0	1573	3185	4.0
	1392	2818	3.56	1392	2818	3.56
<b>Single Doors Unlatched</b> (Single Swing)	1210	2450	2.96	1210	2450	2.96
	1210	2450	2.96	1210	2450	2.96
	1210	2450	2.96	1210	2450	2.96
<b>Double Doors</b> (Single Swing - latched or unlatched, equal or unequally split) Dimensions quoted are per leaf.	1573	3185	4.0	1573	3185	4.0
	1573	3185	4.0	1573	3185	4.0
	1392	2818	3.56	1392	2818	3.56

**Thickness:** 54mm

**Material:** 1.2mm Corrosion resistant Magnelis® sheets as standard with a variety of colours and finishes available.

**Infill:** Self support resin impregnated honeycomb core with option of mineral wool available for improved thermal performance.


**Construction:** A non welded construction from 2 skins of Magnelis® folded around a rigid core. Stainless steel 240minute fire rated doors must be fitted with a 'Z' and astragal section to form a rebated meeting stile.

### > DOOR FRAME

**Construction:** Folded from 1.5mm Magnelis®. Screw and tab construction with 4 no adjustable fixing feet per jamb. Variable sub frame supplied as standard to accommodate site tolerance of -0/+30mm. Frame is fitted with 3 no class 13 hinges with 2 no dog bolts

#### Profile:

Types A & B available in both Inward & Outward Opening Versions.

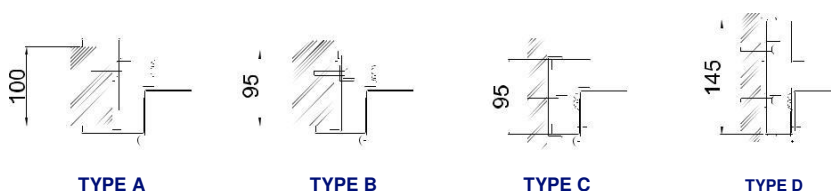

## > WALL CONSTRUCTION

**Construction Types:**

All Fire Doors (INNA-DOR 60, 120 & 240) can be used in all forms of Masonry, Concrete and Flexible Stud Wall (cold wall style). When using Timber or Steel Stud Walls the client must ensure they have adequate evidence that the wall can support steel fire doors under fire conditions. 120 & 240 rated Stud Wall constructions should have the walls' reveal face protected by a fire resting board to protect the wall construction.




## > THRESHOLD

Standard			Optional
15mm Aluminium (DDA compliant)	5mm driveable (DDA compliant)	No threshold	15mm rebated threshold

## > FINISHES

Standard	Optional				
Polyester Powder Coated from Standard Colour Range	Polyester Powder Coated from Non-Standard Colour Range	PVC Laminate from Standard Range	Woodgrain PVC Laminate	Stainless Steel Brushed, Polished or Patterned	Unfinished for site finishing

## > VISION PANELS

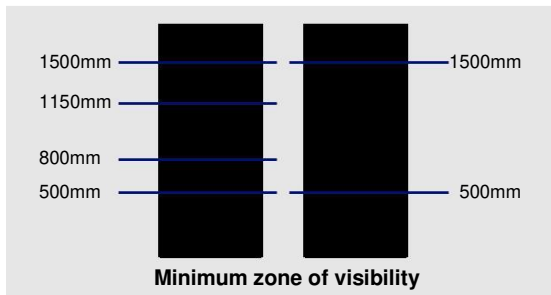

305mm dia	457mm dia	254x254mm	254x559mm	254x559mm	254x762mm	254x762mm 254x559mm Part M compliant	254x1524mm Part M compliant*	610x610mm*

**INNA-DOR 60    INNA-DOR 120**

**INNA-DOR 240**

\*Exceed maximum area for INNA-DOR 240 and cannot be used at that rating.

		<b>INNA-DOR 60</b>	<b>INNA-DOR 120</b>	<b>INNA-DOR 240</b>
<b>Permitted panel sizes:</b>	Max Width mm	610	610	214
	Max Height mm	1854	1854	1483
	Max Area m <sup>2</sup>	0.8	0.8	0.32
<b>Standard glazings available:</b> Other configurations and sizes available – please contact the Sales Office.		Pyrostem FireDoor60 (wired or clear)	8mm Firelite Safety*	8mm Firelite


Telephone: 0845 863 0590

Email: [sales@sssindustrialdoors.co.uk](mailto:sales@sssindustrialdoors.co.uk)

Visit Our Website: [www.sssindustrialdoors.co.uk](http://www.sssindustrialdoors.co.uk)

## > LOUVRE PANELS

<b>Construction:</b>	Consists of an intumescent block grille only 14mm thick within the door leaf and an FDLS two-part steel louvre set which fixes to both sides of the door and sandwiches the FB intumescent block. 18g Galvanised steel frame louvre blades. (Stainless steel Grade 304 and Grade 316 available to order.)
<b>Applications:</b>	Designed to be used on fire rated doors fitted to rooms that require ventilation. A standard louvre will allow ventilation but will also allow the passage of flames and smoke, but a Fire Block Louvre System will maintain the integrity of fire doors and prevent the spread of flames. Examples are doors to plant rooms, stores, computer rooms, changing facilities and manufacturing areas. In fact, any area that requires ventilation but is protected by a fire rated door.

		<b>INNA-DOR 60</b>	<b>INNA-DOR 120</b>	<b>INNA-DOR 240</b>	
<b>Permitted panel sizes:</b>	Max Width	mm	610	610	235
	Max Height	mm	1854	1854	1631
	Max Area	m <sup>2</sup>	0.4	0.4	0.35
<b>Allowed panels by relevant British Standard:</b>		457 x 457 mm lower	BS 476	BS 476	BS 476
		457 x 457 mm upper	BS EN1634 BS-723	BS EN1634 BS-723	BS EN1634 BS-723
		457 x 457 mm	BS 476	BS 476	
		610 x 610 mm lower	BS 476	BS 476	BS EN1634
		610 x 610 mm upper	BS EN1634 BS-723	BS EN1634 BS-723	

## > SIDE AND OVER PANEL ARRANGEMENTS

<b>Construction:</b>	Panels can be solid, glazed or louvred.
<b>Applications:</b>	Hinged panels, flush or glazed. Other glazing arrangements can be fitted subject to satisfactory evidence of testing in a steel door. Please consult the Sales office with specific requirements

<b>Solid permitted overpanel sizes</b> (fixed and hinged):	Max Height	mm	2964	2964	2622
	Removable Transom		Yes	Yes	Yes
<b>Permitted sidepanel sizes:</b>	Max Width	mm	1385	1385	1385
	Max Height	mm	2860	2860	2860
<b>Permitted glazed overpanel and sidepanel sizes:</b>					
<b>FireDoor60:</b>	Max Height	mm	2880	2520	
	Max Area	m <sup>2</sup>	4.08	3.53	
<b>Pyrostem Wired Safety E Glass:</b>	Max Height	mm	2500	2060	
	Max Area	m <sup>2</sup>	2.55	2.88	
<b>8mm Firelite:</b>	Max Height	mm	2060	2060	2060
	Max Area	m <sup>2</sup>	2.88	2.88	2.88

## > REGULATORY REQUIREMENTS FOR FIRE TESTING

The Building Regulations for England and Wales Approved document B ( Fire Safety, Appendix B) requires that all fire doors should have the appropriate performance:

A. By their performance under test to:

BS 476: Fire test on building materials and structures, Part 22 (Methods for determination of the fire resistance of non-loadbearing elements for a period of minutes). OR

B. Part 2 Classification using data from fire resistance tests. They are tested to the relevant European method from the following:  
BS EN 1634-1:200, Fire resistance tests for door and shutter assemblies, Part 1 (Fire doors and shutters).

The building regulations further states that: "Any test evidence used to substantiate the fire resistance rating of a door or shutter should be carefully checked to ensure that it adequately demonstrates compliance and is applicable to the complete installed assembly. Small differences in detail (such as glazing apertures,....) may significantly affect the rating".

## > VERIFICATION AND CERTIFICATION

All Fire Resistant Doors have been tested to both BS 476 and BS EN 1634

All steel doors are manufactured strictly in accordance with ISO 9000.

We undertake a regular programme of testing which may modify the information contained depending on latest test evidence. For project specific requirements please contact the sales office on 00000 000000.