

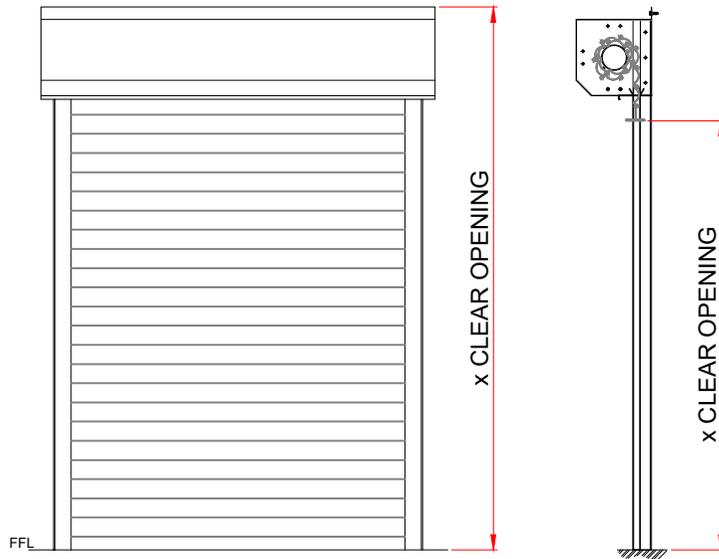



| | |
|-----------------|---------------|
| FIRE RATING: | E60 |
| FIXING: | FACE |
| COIL: | STANDARD |
| ANGLE: | 75 x 50 x 5mm |
| GUIDE: | 65mm GUIDE |
| END PLATE: | 300mm |
| LATH TYPE: | 22swg SOLID |
| BOTTOM RAIL: | T RAIL |
| BARREL: | 102 x 3.6mm |
| MOTOR: | 1 SERIES |
| SAFETY BRAKE: | RSB0 |
| HOOD: | YES |
| FINISH: | x |
| CURTAIN WEIGHT: | x |
| SHUTTER WEIGHT: | x |

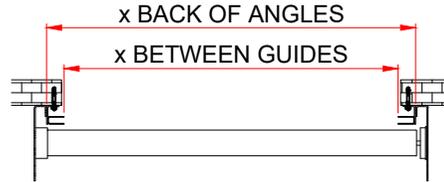

PLAN DETAILED VIEW

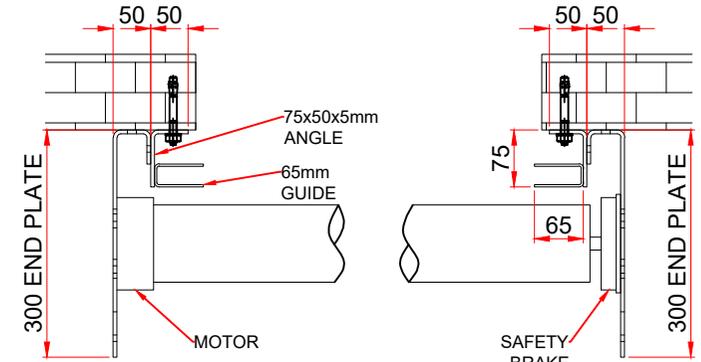

SECTION DETAILED VIEW

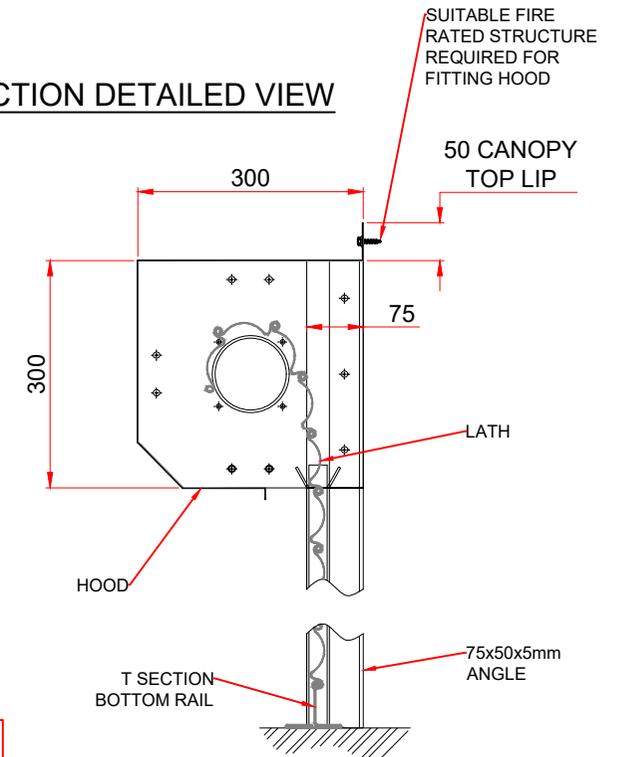

ADDITIONAL NOTES:

ALL RIGHTS RESERVED.
REPRODUCTION OR TRANSMISSION OF THE DRAWING IS NOT PERMITTED WITHOUT CONSENT.
ALL DIMENSIONS IN MILLIMETERS.
ANY DISCREPANCIES TO BE REPORTED TO SSS INDUSTRIAL DOORS IMMEDIATELY.
DO NOT SCALE FROM DRAWING.



Red Earth Farm
Plantation Road
Bolton
BL7 0DD
T: 01204 853243
www.sssindustrialdoors.co.uk

**FLAME ARMOUR FIRE SHUTTER -
TUBE MOTOR LEFT HAND
(BS EN 16034)**

| | |
|-------------------|---|
| CUSTOMER: | x |
| CUSTOMER ADDRESS: | x |
| ORDER NO: | x |
| DATE: | x |
| DRAWN BY: | x |

| REV: | DESCRIPTION: | DATE: |
|------|--------------|-------|
| | | |
| | | |
| | | |

MANUFACTURED IN ACCORDANCE WITH THE EXTENDED APPLICATION REPORT **BS EN 15269-10** (WARRINGTONFIRE TEST REPORT No. 416673 - ISSUE 3)
BS EN 12604 (SECTION 4.9) CLEARLY STATES THAT AN AUDIO-VISUAL WARNING SHOULD BE INSTALLED WITH ANY FIRE SHUTTER WHICH SELF-CLOSES UPON RECEIVING A CLOSE SIGNAL FROM THE FIRE ALARM. FOR MORE INFORMATION CONTACT THE MANUFACTURER.