

FIRE RATING:	E60
FIXING:	FACE
COIL:	STANDARD
ANGLE:	75 x 50 x 5mm
GUIDE:	100mm GUIDE
END PLATE:	750 x 500mm
LATH TYPE:	22swg SOLID
BOTTOM RAIL:	T RAIL
BARREL:	193.7 x 5 mm
MOTOR:	NBG 800 (1ph)
SAFETY BRAKE:	RSB2/3
HOOD:	REQUIRED
FINISH:	TBC
CURTAIN WEIGHT:	APPROX. 327.3 kg
MOTOR BOX	REQUIRED

FCP03 AUDIO-VISUAL & SLAVE REPEATER CONTROL PANEL REQUIRED

ISOLATED, TEST & RESET, PUSH BUTTON STATION & KEY SWITCH REQUIRED

(OPTIONAL) UPS BATTERY BACKUP 2000VA



ALL RIGHTS RESERVED.  
REPRODUCTION OR TRANSMISSION OF THE DRAWING IS NOT PERMITTED WITHOUT CONSENT.  
ALL DIMENSIONS IN MILLIMETERS.  
ANY DISCREPANCIES TO BE REPORTED TO SSS INDUSTRIAL DOORS IMMEDIATELY.  
DO NOT SCALE FROM DRAWING.




Red Earth Farm  
Plantation Road  
Bolton  
BL7 0DD  
T: 01204 853243  
www.sssindustrialdoors.co.uk

**FLAME ARMOUR INLINE FIRE SHUTTER - RIGHT HAND (BS EN 16034)**


CUSTOMER:	DALMILLINGS PS (LMA)	
CUSTOMER ADDRESS:	x	
ORDER NO:	x	
DATE:	x	
DRAWN BY:	x	
REV:	DESCRIPTION:	DATE:

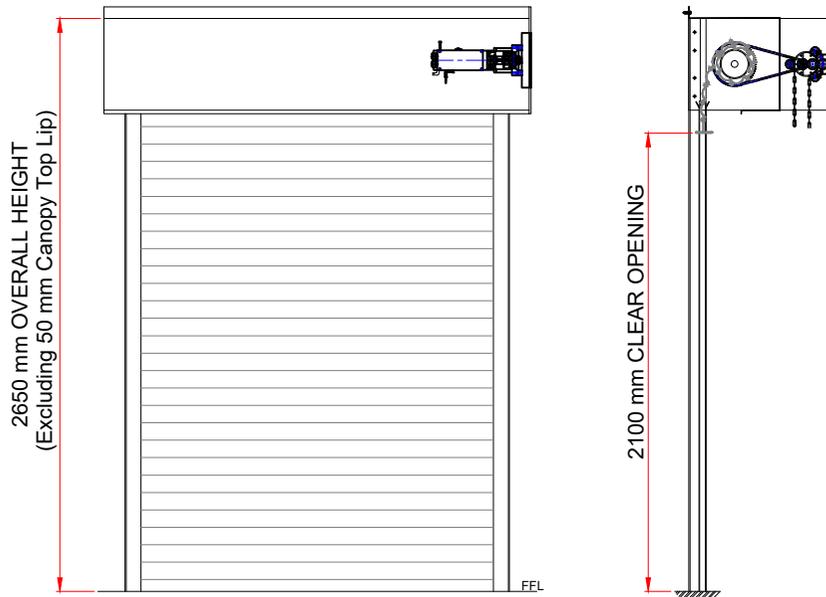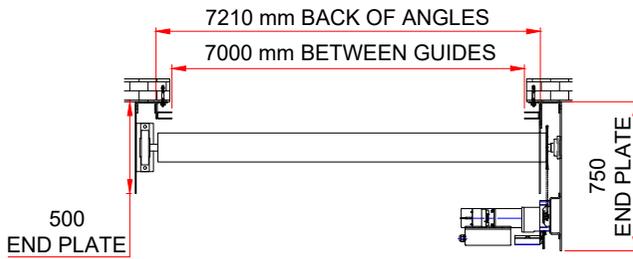

**PLAN DETAILED VIEW**

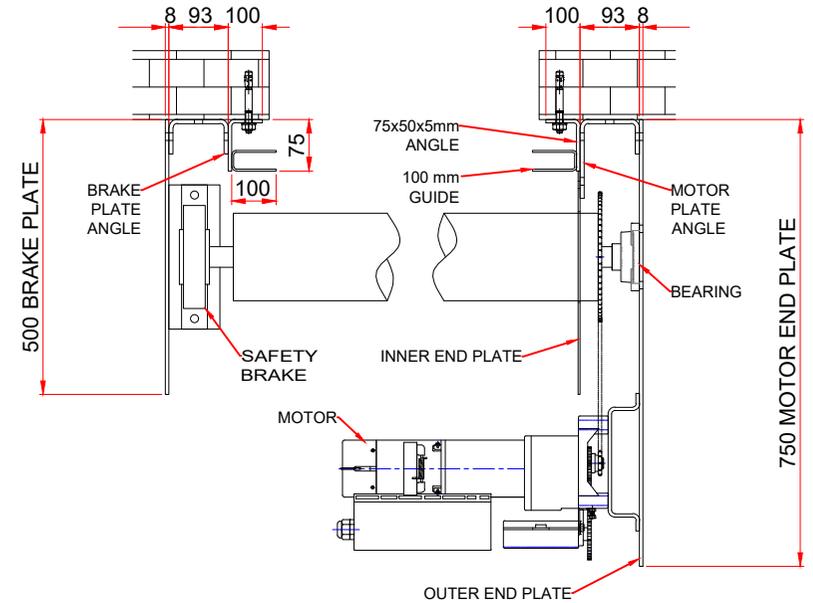

**SECTION DETAILED VIEW**

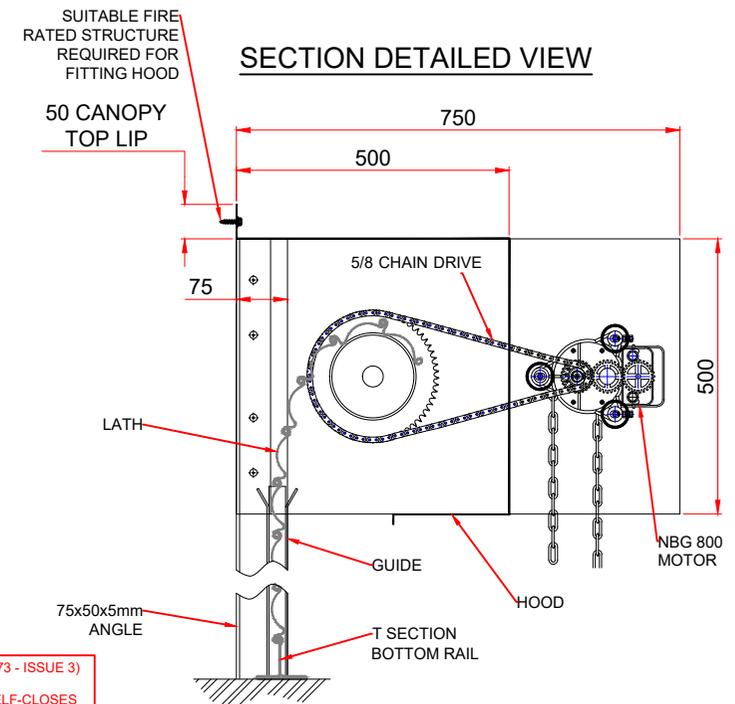

MANUFACTURED IN ACCORDANCE WITH THE EXTENDED APPLICATION REPORT **BS EN 15269-10** (WARRINGTONFIRE TEST REPORT No. 416673 - ISSUE 3)  
BS EN 12604 (SECTION 4.9) CLEARLY STATES THAT AN AUDIO-VISUAL WARNING SHOULD BE INSTALLED WITH ANY FIRE SHUTTER WHICH SELF-CLOSES UPON RECEIVING A CLOSE SIGNAL FROM THE FIRE ALARM. FOR MORE INFORMATION CONTACT THE MANUFACTURER.