

FIRE RATING:	E60
FIXING:	FACE
COIL:	STANDARD
ANGLE:	50 x 50 x 5mm
GUIDE:	65mm GUIDE
END PLATE:	250 / 300 mm
LATH TYPE:	20swg SOLID
BOTTOM RAIL:	T RAIL / QUIRK S.
BARREL:	102 x 3.6mm
MOTOR:	130NM DRS UK
SAFETY BRAKE:	RSB0
HOOD:	YES
FINISH:	x
CURTAIN WEIGHT:	x
SHUTTER WEIGHT:	x

ADDITIONAL NOTES:  
 FCP03 INTERFACE PANEL  
 1000VA BATTERY BACKUP

ALL RIGHTS RESERVED.  
 REPRODUCTION OR TRANSMISSION OF THE DRAWING IS NOT PERMITTED WITHOUT CONSENT.  
 ALL DIMENSIONS IN MILLIMETERS.  
 ANY DISCREPANCIES TO BE REPORTED TO SSS INDUSTRIAL DOORS IMMEDIATELY.  
 DO NOT SCALE FROM DRAWING.





Red Earth Farm  
 Plantation Road  
 Bolton  
 BL7 0DD  
 T: 01204 853243  
 www.sssindustrialdoors.co.uk


BASED ON WF TEST REPORT NO. 552862  
**FLAME ARMOUR+ (SERVERY HATCH)**  
**FIRE SHUTTER - TUBE MOTOR RH**  
**(BS EN 16034)**

CUSTOMER:	x
CUSTOMER ADDRESS:	x
ORDER NO:	x
DATE:	x
DRAWN BY:	x


REV:	DESCRIPTION:	DATE:

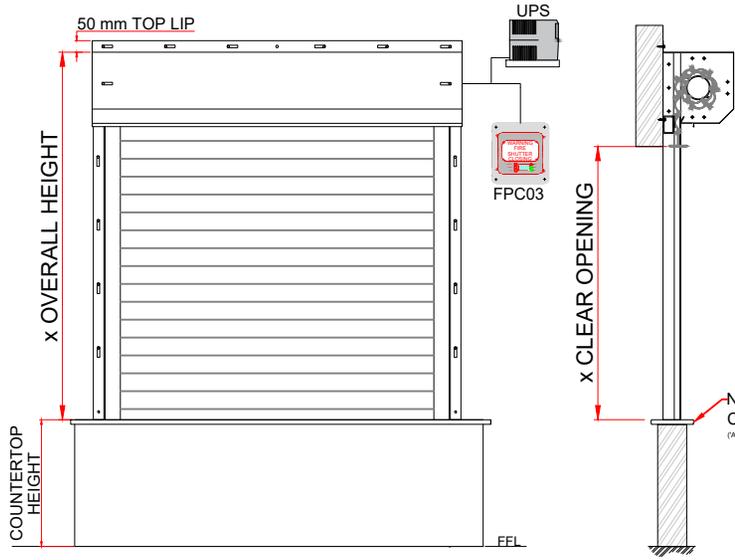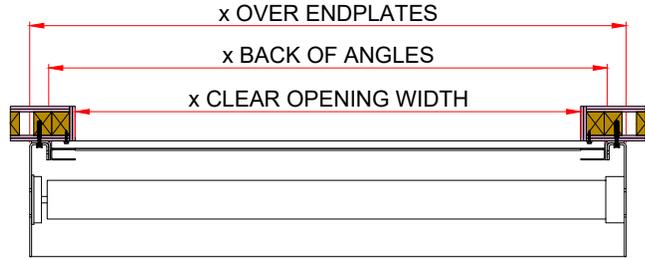

**PLAN DETAILED VIEW**

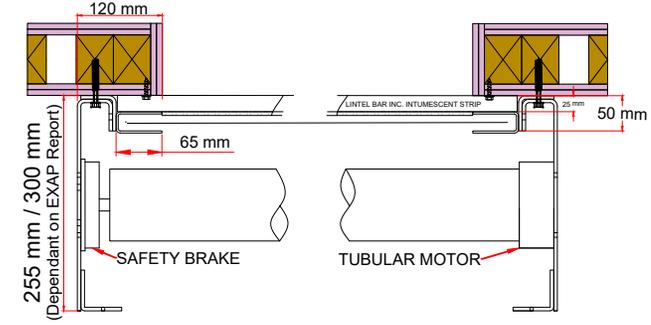

**SECTION DETAILED VIEW**

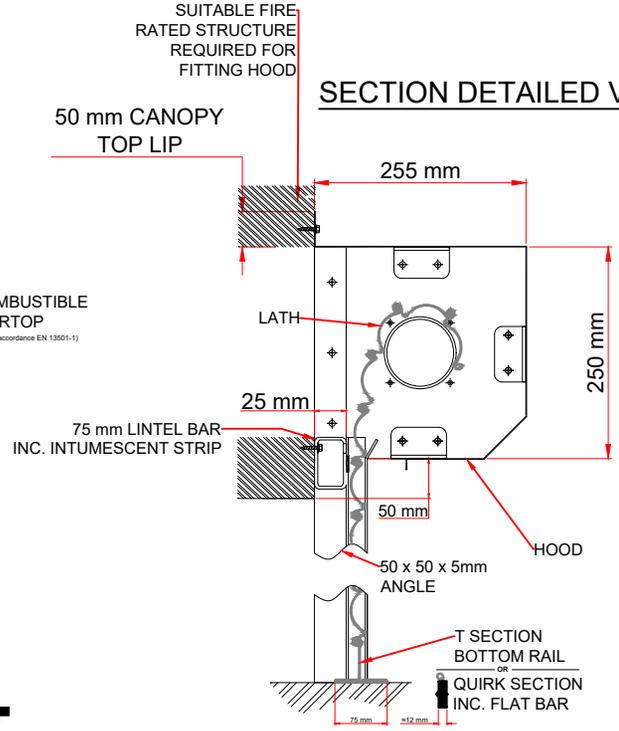

MANUFACTURED IN ACCORDANCE WITH THE EXTENDED APPLICATION REPORT NO. EUI-25-000555, or TECHNICAL ASSESSMENT REPORT NO. FPA 107941.  
 BS EN 12604 (SECTION 4.9) CLEARLY STATES THAT AN AUDIO-VISUAL WARNING SHOULD BE INSTALLED WITH ANY FIRE SHUTTER WHICH SELF-CLOSES UPON RECEIVING A CLOSE SIGNAL FROM THE FIRE ALARM. FOR MORE INFORMATION CONTACT THE MANUFACTURER.  
 CE MARK IN ACCORDANCE WITH EN 13241 & SUPPLY OF MACHINERY (SAFETY) REGULATIONS 2008

